



Frontier

For Children 2 years and 25 lbs and up



Britax



Registration and Certification Information	2
General Warnings	3
Child Size: Height and Weight Limitations.....	4
Harness Mode.....	4
Booster Mode	5
Child Seat features Overview	6
Harness Height Adjustment	8
Head Restraint Adjustment	9
Adjusting Buckle Position	10
Fastening the Buckle	12
Releasing the Buckle	12
Using the LATCH Connectors	12
Using the Versa-Tether.....	13
Using the Chest Clip	15
Using the Recline Block.....	15
Using the Cup Holders.....	16
Using the Arm Rests.....	16
Vehicle Compatibility.....	17
Vehicle Seating Positions	17
Understanding Vehicle Seat Belts	18
General Information	20
Harness Mode: Installing Your Child Seat	22
Harness Mode.....	22
LATCH – Short Path	22
Selecting a Belt Path.....	24
Lap-Shoulder Belt – Short Path	26
Lap Shoulder Belt – Long Path	28
Lap Belt –Short Path	30
Switching Between Modes.....	32
Booster Mode: Positioning Your Child Seat	36
Booster Mode	36
LATCH.....	36
Lap-Shoulder Belt.....	38
Securing Your Child.....	39
Harness Mode.....	40
Booster Mode	42
Care and Maintenance.....	44
Cover Removal	44
Replacing the Cover.....	47
Cleaning the Cover	49
Cleaning the Harness	50
Cleaning the Shell	50
Cleaning the Buckle	50
Versa-Tether as Crash Indicator	53
Troubleshooting	54
Warranty.....	55

This product and its components are subject to change without notice.

© 2008 Britax Child Safety, Inc. All rights reserved. Printed in U.S.A. P319300_R2:07.08

Registration and Certification Information



Child seats could be recalled for safety reasons. You must register this child seat to be reached in a recall. Please complete and return the attached registration card to Britax Child Safety, Inc., 13501 South Ridge Drive, Charlotte, NC 28273, or call 1-888-4BRITAX, or register online at www.BritaxUSA.com/registration.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY:1-800-424-9153), or go to <http://www.NHTSA.gov>

Certification



Certified for
Aircraft Travel

This child restraint system conforms to all applicable Federal Motor Vehicle Safety Standards.

This Restraint is Certified for Use in Motor Vehicles and Aircraft; when Used in Harness Mode.

This Restraint is Not Certified for Use in Aircraft; when Used in Booster Mode.

Follow Lap-Belt installation method found on page 26, for installation of child seat in aircraft.

NOTE: Versa-Tether cannot be used on aircraft.



Install your child seat in a window seat to avoid blocking the aisle.

If the aircraft lap belt is too short, ask the flight attendant for a belt extender.



- This child seat must not be used in the home, in boats, or other non-certified applications.
- To prevent injury due to deterioration or hidden damage, discontinue use of this child seat that is older than nine years or has been in a moderate or severe crash. See date of manufacture and expiration date located on child seat shell.
- The primary protection for occupants of a vehicle in a collision is the body of the vehicle itself; a child seat will not protect a child when the vehicle is seriously impacted. However, correctly installed, a child seat will substantially improve the chances for survival in most crashes.
- Cover the child seat when the vehicle is parked in direct sunlight. Parts of the child seat can become hot enough to burn a child.
- Secure this child seat even when it is not occupied. In a crash, an unsecured child seat may injure vehicle occupants.
- Store the child seat in a safe place when it is not being used. Avoid placing heavy objects on top of the child seat.
- Never use the harness or adjuster strap to lift or carry this child seat. Doing so could damage the harness adjuster and webbing. Always carry this child seat by the shell or tether straps.
- Do not allow children to play with this child seat.

Child Size: Height and Weight Limitations




This child seat is for use forward-facing only with children who meet **all** of the following fit requirements.


Harness Mode:

Children must:

- 1** be at least two years of age **and**
- 2** weigh between 25 – 80 lbs. (11.3 – 36.3 kg.) **and**
- 3** stand 30 – 53 in. (76.2 – 134.6 cm) in height **and**

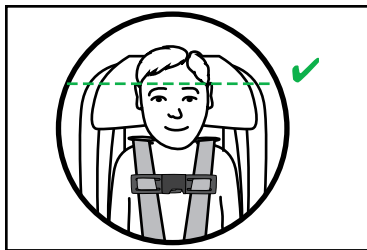

- 4** the top of the child's ears must be below the top of the head restraint when seated **and**

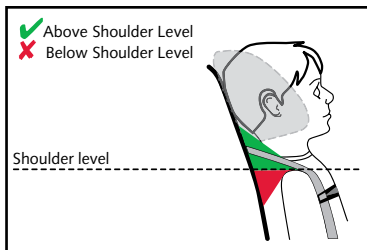

- 5** the harness straps must be located at or above the child's shoulders when seated.


IMPORTANT: If your child does not meet all of the above fit requirements because they are too small, another type of child seat must be used such as an infant carrier or convertible child seat which can be installed rear-facing. If your child does not meet all of the above fit requirements because they are too large, you may need to use this child seat in booster mode. See page 5 for booster fit requirements.



Booster Mode:

Children must:

- 1 stand 42 – 60 in. (106.7 – 152.4 cm) in height **and**
- 2 the top of the child's ears must be below the top of the head restraint **and**
- 3 the vehicle belt must be appropriately positioned at or above the child's shoulder through the shoulder belt guide.

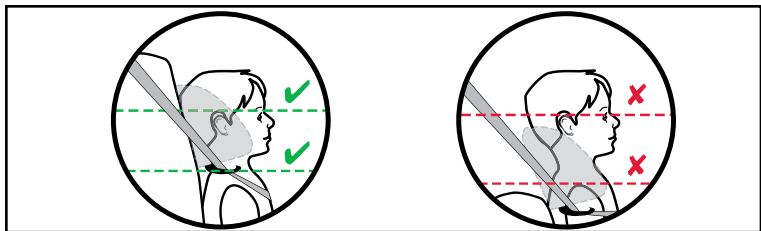

NOTE: This child seat must only be used in booster mode with children 40 lbs (18.1 kg) or more and meet all of the above fit requirements.

Store this user guide behind the cover in the lumbar region of the child seat.



- | | | | |
|----|----------------------|----|----------------------------------|
| 1 | Head Restraint | 11 | Belly Pad |
| 2 | Head Restraint Cover | 12 | Harness Adjuster Strap |
| 3 | Harness Slot | 13 | Cover |
| 4 | Comfort Pads | 14 | Shoulder Belt Guide |
| 5 | HUGS™ Chest pads | 15 | User Guide Storage (under cover) |
| 6 | Harness Straps | 16 | LATCH Strap |
| 7 | Chest Clip | 17 | LATCH Adjuster Release Button |
| 8 | Arm Rest | 18 | LATCH Adjuster |
| 9 | Lap Belt Guide | 19 | LATCH Connector Release Button |
| 10 | Buckle | 20 | LATCH Connector |
| | | 21 | Cup Holder |



- 22 LATCH Connector Storage Slot
- 23 Harness Yoke
- 24 Head Restraint Adjuster Lock
- 25 Head Restraint Adjuster Release
- 26 Manufactured Date and Expiration Date Label
- 27 Harness Height Adjuster

- 28 Versa-Tether® Adjuster
- 29 Versa-Tether
- 30 Shell
- 31 Belt Shield
- 32 Harness Yoke Storage (on belt shield)
- 33 Versa-Tether® Storage Clip
- 34 Recline Block
- 35



Harness Height Adjustment

NOTE: The harness height adjuster also adjusts the height for the head restraint in harness mode. The head restraint will be properly adjusted once the harness is placed appropriately at or above your child's shoulders.



1 Loosen the Harness.



2 Pull the harness adjuster and slide into the nearest position at or slightly above your child's shoulders.

NOTE: The harness adjuster will lock into place once released.

Head Restraint Adjustment

⚠ WARNING: The head restraint adjuster is for booster mode only. DO NOT use the head restraint adjuster when the harness is still attached.




3 Remove the screw from the head restraint adjuster and store in a safe place. The screw will be needed to convert back to harness mode.

4 Lift the head restraint adjuster release to move the head restraint.

NOTE: The head restraint adjuster will lock into place once released.

5 The vehicle belt must be appropriately positioned at or above the child's shoulder through the shoulder belt guide.

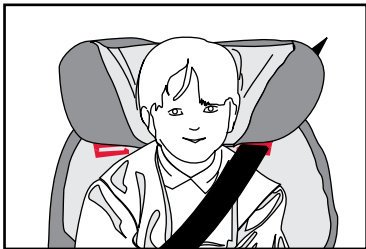



Adjusting Buckle Position

Removing the Buckle



1 Unbuckle the harness.



2 Locate the metal buckle strap retainer on the bottom of the child seat.



3 Pull the retainer away from the child seat to loosen



4 Turn and push the retainer so that the short side will pass through the slot in the child seat shell



5 Pull the retainer through the slots in the child seat shell and cover to the top of the child seat.



Re-threading the Buckle

IMPORTANT: *Select the slot closest to, but not under the child.*



- 1** Turn and push the buckle retainer so that the short side will pass through the slot in the cover and child seat shell.
- 2** Pull through the slots in the cover and child seat shell to the bottom of the child seat.
- 3** Pull the buckle away from the child seat until tight. Verify that the buckle retainer lies flat against the child seat shell. Ensure that the buckle strap is not twisted and that the button faces out.



NOTE: *The belly pad must be pulled over the metal retainer to remove.*



Fastening the Buckle



Insert one tongue at a time into the buckle.

NOTE: Proper connection is confirmed with a positive click after inserting each buckle tongue.

Releasing the Buckle



Press the release button to eject the tongues from the buckle.

NOTE: Periodically clean the buckle to ensure proper operation.

Using the LATCH Connectors

- 1 Disconnect the LATCH connectors from the LATCH connector storage slots.





2 Locate the LATCH anchors in your vehicle.

3 Verify that the LATCH connector is right-side up and that the LATCH strap is not twisted before connecting.

NOTE: The LATCH connectors will click when properly attached.

IMPORTANT: Refer to your vehicle owner's manual or contact the vehicle manufacturer for the maximum weight rating for their LATCH anchors. Use the vehicle belt (not LATCH) for installations with children who weigh more than the vehicle LATCH anchor limit. Unless specified otherwise by the vehicle manufacturer, assume a 40 pound (18.1 kg.) child is the vehicle LATCH anchor limit. Only use the vehicle's designated tether anchor for the chosen seating position.

Using the Versa-Tether



WARNING:

- Attach the Versa-Tether only to tether anchors identified by your vehicle manufacturer as tether anchorage points.
- If your vehicle does not currently have a tether anchor attachment, refer to your vehicle owner's manual or contact your vehicle manufacturer for assistance. **DO NOT** modify your vehicle without advice from your vehicle manufacturer.

When using the child seat in harness mode:

- Britax recommends that the tether be used at all times when installing the child seat. Using the tether will improve the stability of your child seat and reduce the risk of injury.
- Always use the Versa-Tether for children weighing 65 – 80 lbs (29.5 – 36.3 kg).

IMPORTANT: You must use the Versa-Tether if installing the child seat using the LATCH connectors.



To Attach the Versa-Tether:



1 Remove the Versa-Tether from the storage clip.



2 Loosen the tether and place over the child seat back.



3 Tilt the tether adjuster tab and pull to fully extend the tether.



4 Locate the tether hook on the strap.



5 Attach the tether hook to a designated anchor point.



6 Tighten the tether.

NOTE: Anchor point locations in vehicles vary. Consult your vehicle owner's manual to help identify the anchor location.

IMPORTANT: Ensure any excess Versa-Tether® webbing is contained within your vehicle.



Using the Chest Clip




1 Opening the chest clip.




2 Fastening the chest clip

IMPORTANT: The correct height for the chest clip is at the middle of the chest at armpit level.

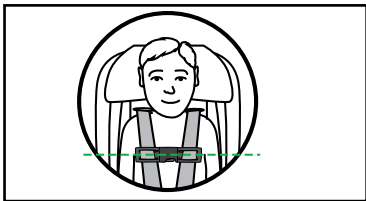

Using the Recline Block

IMPORTANT: Set the recline block position *BEFORE* installing into your vehicle.

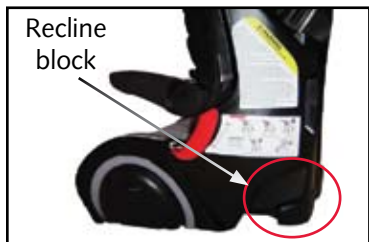

1 Booster Position



2 Harness Position

NOTE: The default position of the recline block is booster position. You must unhook the Versa-Tether from the storage clip (if connected) before moving the recline block.



Using the Cup Holders



1 Pull the handle up and out to open the cup holder.



2 Push the base of the cup holder down to lock into place.



3 Push the base of the cup holder up to unlock.



4 Push the cup holder in to return to the stowed position.

IMPORTANT: Do not put containers of hot liquids in the cup holders. Stow the cup holders when not in use.

Using the Arm Rests

The arm rests can be rotated up and down. They also can be used to hold the harness when securing your child.

IMPORTANT: The arm rests must be in the down position during travel.




Vehicle Seating Positions

WARNING:

- A forward-facing child seat in the front seat of a vehicle with a passenger air bag is not recommended. DEATH or SERIOUS INJURY can occur.
- When using this child seat in a vehicle with air bags, refer to the vehicle owner's manual for child seat installation instructions and precautions.

Based on crash statistics, the National Highway Traffic Safety Administration recommends that parents select a rear seating position as the safest location for a properly installed child seat. The back seat is the safest place for children 12 and under.

Please study Understanding Vehicle Seat Belts on page 18 of this booklet to ensure the child's safety. If in doubt about installing the child seat, consult the vehicle owner's manual.

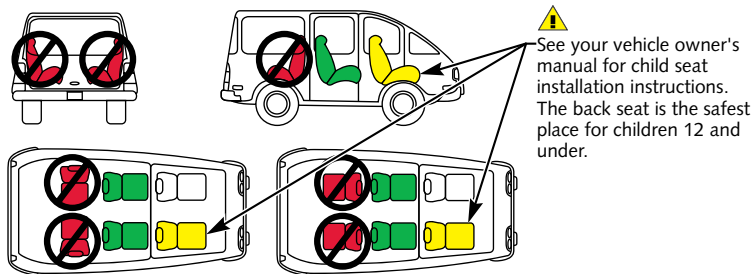

 **WARNING:** Forward-facing vehicle seats **MUST** be used with this child seat. Side-facing or rear-facing seats **CANNOT** be used.

Vehicle Compatibility

Vehicle seat belts and LATCH anchor locations vary. Consult your vehicle owner's manual for details on what type of seat belts your vehicle has and where to find your LATCH anchors (if available).



IMPORTANT: Refer to your vehicle owner's manual or contact the vehicle manufacturer for the maximum weight rating for their LATCH anchors. Use the vehicle belt (not LATCH) for installations with children who weigh more than the vehicle LATCH anchor limit. Unless specified otherwise by the vehicle manufacturer, assume a 40 pound (18.1 kg.) child is the vehicle LATCH anchor limit. Only use the vehicle's designated tether anchor for the chosen seating position. Do not connect more than one LATCH anchor or tether hook to a single vehicle anchor.

Understanding Vehicle Seat Belts

NOTE: The information in this section only applies to installation with vehicle safety belts.

This child seat can fit securely in most vehicles using existing vehicle belts; however, some vehicle designs prevent a secure fit of the child seat due to the position of the vehicle belt lower anchorage points.



WARNING: Use only the vehicle's lap and shoulder belt system when restraining a child in booster mode. Never restrain a child with a lap belt only in booster mode.



Vehicle Compatibility

If your belt type is listed below, select another seating position or use the LATCH connectors.

The following types of vehicle belts are **not** compatible with this child seat:



1 Vehicle belts with the top or bottom anchorage points in the door



2 Automatic (motor-driven) vehicle belts.



3 Lap-shoulder belts that have separate retractors for the shoulder and lap sections.

- * Unless the lap belt retractor can be locked.
- * You cannot use this type of belt with this child seat in booster mode.



4 Lap and Lap-shoulder vehicle belts which only lock during a sudden stop or crash (Emergency Locking Retractor-ELR belts).

- * Unless a locking clip is used with a lap-shoulder belt.
- * Unless a belt shortening clip is used with a lap belt

NOTE: If a locking clip is needed and one is not available, please call Britax Consumer Services at: 1-888-427-4829.

Refer to your vehicle owner's manual to determine the kind of retractors used in your vehicle and how to operate them.

General Information



WARNING:

- Install forward-facing only.
- Do not use anything to raise the child seat off of the vehicle seat.
- When using the LATCH connectors you must also use the top tether. If LATCH anchors are not available, you must use vehicle belt installation methods. The child seat is shipped prepared for use in harness mode with the exception of the recline block position. Refer to your vehicle owner's manual or contact the vehicle manufacturer for the maximum weight rating for the LATCH anchors in your vehicle. Use the vehicle belt (not LATCH connectors) for installations with children who weigh more than the vehicle LATCH anchor limit. Unless specified otherwise by the vehicle manufacturer, assume a 40 pound (18.1 kg) child is the vehicle LATCH anchor limit.
- Always use the Versa-Tether for children weighing 65 – 80 lbs (29.5 – 36.3 kg) in harness mode.
- Long belt path is only for use with a lap-shoulder belt. Never use the long belt path option with LATCH or a lap belt.

Harness Mode

NOTE: This seat is shipped with the recline block in booster mode.

IMPORTANT:

- This child seat can be installed using LATCH, a lap-shoulder belt, or a lap belt only.
- The recline block must be rotated to the front when installing the child seat in harness mode.
- Based upon your vehicle's seat belt configuration, you may achieve a more secure installation using one of two approved lap-shoulder belt path options (long belt path or short belt path). If the first installation method results in more than 1" (2.5 cm) of front-to-back or side-to-side movement at the belt path, then try the other option. See page 24 for information on selecting a belt path to install this child seat in your vehicle.





- This child seat can be used in harness mode with children at least 2 years of age and 25 – 80 lbs (11.3 – 36.3 kg) who stand 30 – 53 in. (76.2 – 134.6 cm) in height. Britax recommends using harness mode to 80 lbs (36.3 kg). See the Child Size: Height and Weight Limitations section on page 4 for information on when your child has outgrown harness mode.


Booster Mode

- The recline block must be rotated to the back when positioning the child seat in booster mode.
- This child seat can be used in booster mode with children who stand 42 – 60 in. (106.7 – 152.4 cm) in height and weigh more than 40 lbs (18.1 kg). Britax recommends using harness mode to 80 lbs (36.3 kg). See the Child Size: Height and Weight Limitations section on page 4 for information on when your child has outgrown harness mode.



WARNING: Use only the vehicle's lap and shoulder belt system when restraining a child in booster mode. Never restrain a child with a lap belt only in booster mode.

- When positioning this child seat in booster mode use the vehicle's lap-shoulder belt to secure the child and child seat into the desired seating position.
- In booster mode, this child seat can be positioned on the vehicle seat using LATCH. Use the vehicle's lap-shoulder belt to secure the child. Ensure that the LATCH system does not interfere with the vehicle belt function and alignment when securing your child.

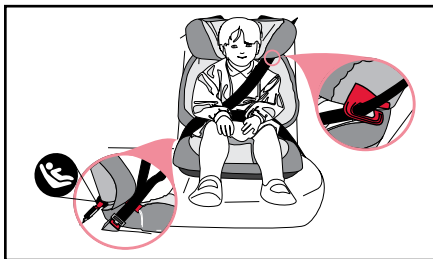

Harness Mode: Installing Your Child Seat



LATCH – Short Path Only

Checklist for proper installation:


Does your vehicle:

✓ Have a top tether anchor?

- * Always use the Versa-Tether for children weighing 65 – 80 lbs (29.5 – 36.3 kg). Britax recommends that the Versa-Tether be used at all times.

✓ Have LATCH anchors?

- * Check your vehicle owner's manual for the vehicle's latch anchor limits.

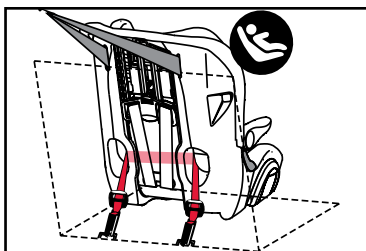

LATCH short path

IMPORTANT: When using the LATCH connectors you must also use the top tether. If LATCH anchors are not available, you must use vehicle belt installation methods.



1 Remove the Versa-Tether from the storage clip.



2 Loosen the tether and place over the child seat back.



3 Rotate the recline block to harness position.



4 Place the child seat on the vehicle seat.



Harness Mode: Installing Your Child Seat



5 Locate the LATCH anchors in your vehicle.

6 Verify that the LATCH strap is not twisted.



7 Attach the LATCH connectors to their adjacent LATCH anchors.

8 Push the child seat into the vehicle seat and pull the loop end of each LATCH strap through the belt slot to tighten.

* Repeat as necessary.

9 Attach and tighten the Versa-Tether.

IMPORTANT: Ensure any excess Versa-Tether® webbing is contained within your vehicle.



10 Check all connections and verify that child seat is secure.

* The child seat is secure when it cannot be moved front-to-back or side-to-side more than 1" (2.5 cm) at the belt path. If the child seat is not secure, repeat the installation procedure or use a different seating location.

Harness Mode: Installing Your Child Seat



Lap-Shoulder Belt – Selecting a Belt Path

Due to the variability in vehicle seat designs and belt systems, the Frontier child seat can be secured to the vehicle seat by a lap-shoulder belt with either a short belt path or a long belt path installation method.


WARNING: Do not use the long belt path for LATCH or Lap-belt installations.

The following may help with selecting which belt path to try first:

- A** Place the child seat on the vehicle seat in the chosen seating position. Note the position of the vehicle belt buckle stalk relative to the child seat.




- B** If the buckle stalk is behind the child seat (i.e. the child seat is wider than the insertion points of the vehicle belt system), then the short belt path may be the best option to try first.

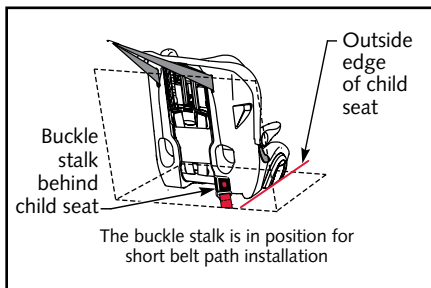



Harness Mode: Installing Your Child Seat

C *If the buckle stalk is to the side of the child seat (i.e. the child seat is narrower than the insertion points of the vehicle belt system), then the long belt path may be the best option to try first.*

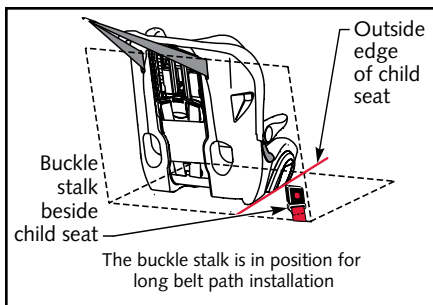

If one installation method results in more than 1" (2.5 cm) of front-to-back or side-to-side movement at the belt path, then try the other method.

Both the short and long lap-shoulder belt path installation methods meet or exceed all compliance standards required by the federal government. Either of these options can be used based upon vehicle compatibility for children at least 2 years old and 25 lbs (11.3 kg) up to 80 lbs (36.3 kg) in the harness mode.

Harness Mode: Installing Your Child Seat



Lap-Shoulder Belt – Short Path

Checklist for proper installation


Does your vehicle:

✓ *Have a seat belt that can be locked?*

- * Check your vehicle owner's manual to determine what type of vehicle belt you have and how it can be locked for use with child seats.

✓ *Have a top tether anchor?*

- * Always use the Versa-Tether for children weighing 65 – 80 lbs (29.5 – 36.3 kg). Britax recommends that the Versa-Tether be used at all times. Using the tether will improve the stability of the child seat and reduce the risk of injury. Check your vehicle owner's manual for tether anchor locations.

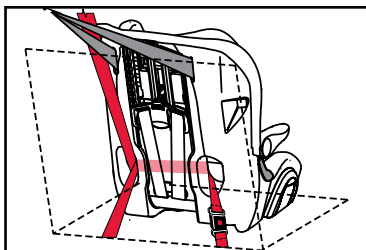

Lap-shoulder belt short path



1 *If the vehicle has a tether anchor for the chosen seating position, then remove the Versa-Tether from the storage clip.*



2 *Loosen the tether and place it up and over the child seat back.*




3 *Rotate the recline block to harness position.*



4 *Place the child seat on the vehicle seat.*



Harness Mode: Installing Your Child Seat

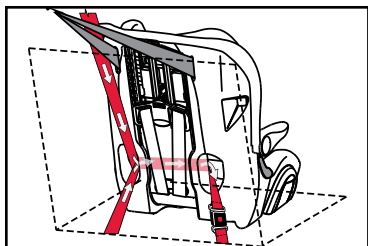

5 Pull the vehicle belt out and route the belt through the first belt slot, under the cover and through the second belt slot.

6 Verify that the belt is not twisted and then buckle.



7 Push the child seat firmly into the vehicle seat while removing all slack from the lap portion, then shoulder portion of the vehicle belt.

- * Ensure that the vehicle belt is locked as directed by your vehicle owner's manual.

8 Attach and tighten the Versa-Tether.

IMPORTANT: Ensure any excess Versa-Tether® webbing is contained within your vehicle.

9 Verify that the vehicle belt is tight and the child seat is secure.

- * The child seat is secure when it cannot be moved front-to-back or side-to-side more than 1" (2.5 cm.) at the belt path. If the child seat is not secure, repeat the installation procedure or use a different seating location.

Harness Mode: Installing Your Child Seat



Lap-Shoulder Belt – Long Path

Checklist for proper installation


Does your vehicle:

✓ *Have a seat belt that can be locked?*

- * Check your vehicle owner's manual to determine what type of vehicle belt you have and how it can be locked for use with child seats.

✓ *Have a top tether anchor?*

- * Always use the Versa-Tether for children weighing 65 – 80 lbs (29.5 – 36.3 kg). Britax recommends that the Versa-Tether be used at all times. Using the tether will improve the stability of the child seat and reduce the risk of injury. Check your vehicle owner's manual for tether anchor locations.

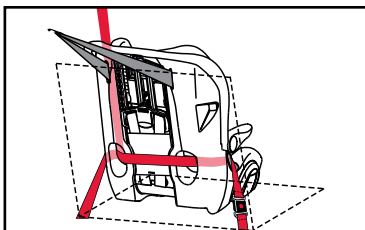

Lap-shoulder belt long path



- 1** *If the vehicle has a tether anchor for the chosen seating position, then remove the Versa-Tether from the storage clip.*



- 2** *Loosen the tether and place it up and over the child seat back.*




- 3** *Rotate the recline block to harness position.*



- 4** *Place the child seat on the vehicle seat.*



Harness Mode: Installing Your Child Seat

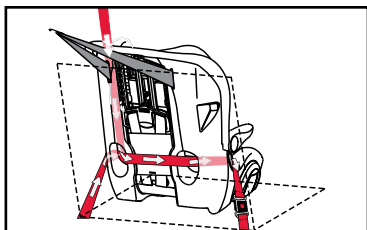

- 5** Pull the vehicle belt out. Route the lap portion of the belt over the red lap belt guide, while positioning the shoulder portion of the belt inside the child seat shell, behind the head restraint.

* Do NOT route the shoulder portion of the vehicle seat belt through the red shoulder belt guide on the head restraint.

- 6** Rejoin the lap and shoulder belt portions of the vehicle belt, route through the belt slot to the back of the child seat, across the back of the child seat shell, then through the second belt slot to the front of the child seat.



- 7** Route the vehicle belt over the red belt guide around to the outside of the child seat. Verify the vehicle belt is not twisted, then buckle.

- 8** Push the child seat firmly into the vehicle seat while removing all slack from the lap portion and then from the shoulder portion of the vehicle belt.

NOTE: Verify that the vehicle belt is tight and the child seat is secure. The child seat is secure when it cannot be moved front-to-back or side-to-side more than 1" (2.5 cm.) at the belt path. If the child seat is not secure, repeat the installation procedure or use a different seating location.

- 9** Attach and tighten the Versa-Tether.

IMPORTANT: Ensure that any excess Versa-Tether® webbing is contained within your vehicle.

Harness Mode: Installing Your Child Seat



Lap Belt – Short Path Only

Checklist for proper installation


Does your vehicle:

✓ *Have a seat belt that can be locked?*

- * Check your vehicle owner's manual to determine what type of vehicle belt you have and how it can be locked for use with child seats.

✓ *Have a top tether anchor?*

- * Always use the Versa-Tether for children weighing 65 – 80 lbs (29.5 – 36.3 kg). Britax recommends that the Versa-Tether be used at all times. Using the tether will improve the stability of the child seat and reduce the risk of injury. Check your vehicle owner's manual for tether anchor locations.

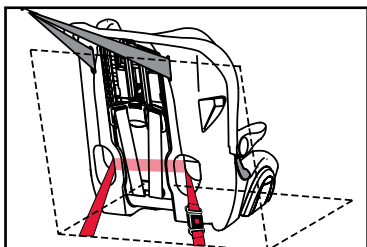

Lap belt short path



- 1** *If the vehicle has a tether anchor for the chosen seating position, then remove the Versa-Tether from the storage clip.*



- 2** *Loosen the tether and place it up and over the child seat back.*




- 3** *Rotate the recline block to harness position.*



- 4** *Place the child seat on the vehicle seat.*



Harness Mode: Installing Your Child Seat

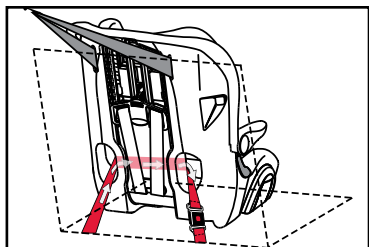

5 Pull the vehicle belt out and route the belt through the first belt slot, under the cover and through the second belt slot.

6 Verify that the belt is not twisted and buckle.



7 Push the child seat firmly into the vehicle seat while pulling the lap belt through the belt slot to remove all slack.

* Ensure that the vehicle belt is locked as directed by your vehicle owner's manual.



8 Attach and tighten the Versa-Tether.

IMPORTANT: Ensure any excess Versa-Tether® webbing is contained within your vehicle.

9 Verify that the vehicle belt is tight and the child seat is secure.

* The child seat is secure when it cannot be moved front-to-back or side-to-side more than 1" (2.5 cm.) at the belt path. If the child seat is not secure, repeat the installation procedure or use a different seating location.

Harness Mode: Installing Your Child Seat



This seat can be used in booster mode with children who stand 42" – 60" (106.7 – 152.4 cm) in height and weigh more than 40 lbs (11.3 kg). Britax recommends using harness mode to 80 lbs (36.3 kg). See the [Child Size: Height and Weight Limitations](#) section on page 4 for information on when your child has outgrown harness mode.

Switching Between Modes

Harness to Booster Mode

To remove the harness and buckle:



1 Loosen the harness.



2 Unhook both harness straps from the yoke.

* Do not remove the HUGS™ pads or chest clip.



3 Store the yoke on the belt shield.



4 Pull the shoulder straps of the harness from the slots.



Harness Mode: Installing Your Child Seat



5 On the bottom of the seat, turn the metal retainer of one harness strap so it will slide through the slot.

- * Pull the harness webbing tight from the other side before pulling the retainer through.

6 Pull the retainer all the way through to the top of the seat to remove the harness strap.

- * Repeat the process for the remaining harness strap.
- * Remove the harness buckle strap (see page 10 for buckle strap removal instructions).



7 Buckle the harness and store all parts in a safe place.

8 Remove the screw from the head restraint adjuster and store in a safe place. The screw will be needed to convert back to harness mode.



Booster to Harness Mode

To replace the harness and buckle:



1 Locate the harness assembly.



2 Move the head restraint to the lowest position. Move the harness adjuster to the highest position.



3 Ensure that harness slots in cover, head restraint and harness adjuster are aligned. Replace the screw to lock the head restraint adjuster.



4 From the top of the child seat, turn the metal retainer of the buckle strap so it will slide through the slot.

* Choose the slot that is closest to, but not under your child.

5 Pull on the buckle to ensure the retainer lies flat against the shell.

* Ensure that the button faces out.





Harness Mode: Installing Your Child Seat



6 Turn the metal retainer of one harness strap so it will slide through the slot.

* Ensure that the harness strap is not twisted.



7 Push the retainer to the bottom of the seat shell. Pull the harness strap to ensure the retainer lies flat against the shell.

* Ensure that the chest clip faces out.



8 Insert the top through the harness slot and harness adjuster to the back of the seat.



9 Connect the harness strap to the yoke.

10 Repeat steps 5 through 8 for the remaining harness strap.

11 Once the harness has been connected ensure the chest clip faces out, the straps are not twisted, and are securely fitted onto the harness yoke.




Booster Mode: Positioning Your Child Seat



WARNING:

- Position forward-facing only in a seating position with a lap-shoulder belt.
- Use only the vehicle's lap and shoulder belt system when securing a child in booster mode. Never secure a child with a lap belt only in booster mode.
- In booster mode, this child seat can be positioned to the vehicle seat using LATCH.
- If the LATCH anchors in your vehicle prevent proper vehicle belt fit across your child you cannot use LATCH to position this seat in booster mode.



- * The vehicle belt fits properly when the lap portion sits low across the child's hips and the shoulder portion lies across the child's shoulder and does not contact the child's neck when properly routed through the upper belt guide

LATCH

Checklist for proper installation:

Does your vehicle:

- ✓ Have a top tether anchor in the chosen seating position?
- ✓ Have LATCH anchors in the chosen seating position?

IMPORTANT: Use LATCH to position this child seat to your vehicle seat. You must secure your child using the vehicle Lap-Shoulder belt system.



Booster Mode: Positioning Your Child Seat



1 Unhook the Versa-Tether® hook from the storage clip.

2 Ensure the recline block is in the booster position.



3 Place the child seat on the vehicle seat.

4 Connect the LATCH connectors to the LATCH anchors.




5 Push the child seat into the vehicle seat and pull the loop end of each LATCH strap through the belt slot to tighten.

6 Attach the Versa-Tether to the vehicle's designated tether anchor for the chosen seating position.

Booster Mode: Positioning Your Child Seat



7 Tighten the Versa-Tether.

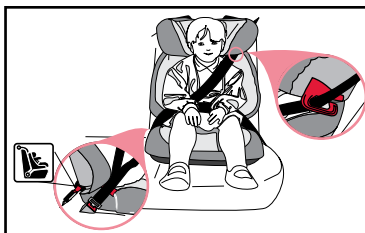

8 Use the vehicle's lap-shoulder belt to secure your child.

Lap-Shoulder Belt




1 Ensure that the recline block is in booster position.



2 Place the child seat on the vehicle seat.

3 Use the vehicle's lap-shoulder belt to secure your child.

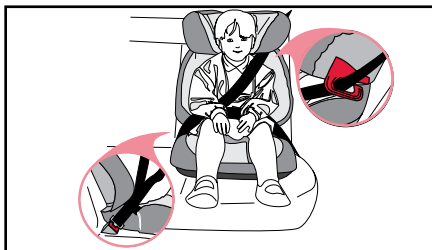

WARNING: Always secure this child seat in your vehicle when unoccupied by using LATCH or the lap-shoulder belt.



WARNING:

Harness Mode


- *Never route the vehicle belt over the child when using this child seat in harness mode.*
- *Adjust the belts provided with this child seat so they fit snugly around your child. A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.*
- *The HUGS™ chest pads must be used at all times.*
- *Adjust the harness to fit the clothes the child is wearing. Remove bulky coats and/or jackets before putting the child in the child seat.*
- *Verify that the child seat is secure and the harness is properly adjusted around the child **each** time the child seat is used.*

Harness Mode

IMPORTANT: Before securing your child in the child seat, always check the seat area for debris and remove it to prevent interference with the harness adjuster mechanism.



Loosen the harness.

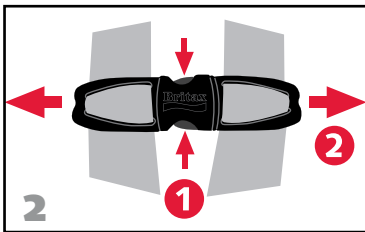

Open the chest clip.

- 1 Press tabs
- 2 Pull apart

Securing Your Child



Harness Mode *continued*



3 Release the buckle.



4 Place the harness straps around the armrests.



5 Place the child in the child seat and position the harness straps around the child.



6 Fasten the child seat buckle.

IMPORTANT: Check the fit of the harness height on your child each time the child seat is used. See page 4 for child fit requirements. The harness height must be set before the seat is installed in your vehicle (see page 8). If the harness needs adjustment, remove the seat, adjust the harness and reinstall.



7 *Fasten the chest clip.*

- * The correct height for the chest clip is at the middle of the chest at armpit level.
- * The HUGS™ chest pads may be placed in any position that is comfortable for the child within the range of the correctly placed chest clip.

8 *Pull the harness adjuster strap to fully tighten the harness.*

- * It may be necessary to adjust the harness straps and HUGS™ chest pads for comfort and snugness as you tighten the harness. The harness should have a comfortable but snug fit around the child. A snug fit allows you to place no more than two fingers between your child's collarbone and the harness.

NOTE: *The arm rests must be in the down position during travel.*

9 *Verify secure installation.*

Check that the:

- ✓ *Harness straps are not twisted.*
- ✓ *Harness is snug.*
- ✓ *Buckle is fastened.*
- ✓ *Chest clip is at the child's armpit level.*

Securing Your Child



Booster Mode



WARNING:

Booster Mode

- Only use a lap-shoulder belt to secure the child in booster mode.
- Use the red belt guides on the child seat to ensure proper fit.
- Ensure the lap portion of the belt sits low across the child's hips and that the shoulder portion does not contact the child's neck.



1 Place the child seat on the vehicle seat and have the child sit in the child seat.



2 Adjust the head restraint so when seated, the ears are below the top of the head restraint and the vehicle belt will be appropriately positioned at or above the child's shoulder through the shoulder belt guide.

3 Pull the vehicle belt out.





4 Route the shoulder portion of the vehicle belt through the upper belt guide.

5 Fasten the vehicle belt across the child.

* The lap part of the vehicle belt should rest low on the child's hips.

6 Remove slack from the vehicle belt.

* The shoulder belt should rest on the child's shoulder and not touch the neck.



7 Verify secure installation.
Check that the:

- ✓ Vehicle belt is not twisted.
- ✓ Buckle does not rest on red belt guide.
- ✓ Shoulder portion of vehicle belt is routed through upper belt guide.
- ✓ Lap part of the vehicle belt is routed low across the child's hips



WARNING:

- *Do not take apart the harness.*
- *Never remove the buckle tongues from the harness. They cannot be reattached after removal.*
- *Never remove the HUGS system from the harness straps.*

Cover Removal



1 Loosen the harness.



2 Move the harness adjuster to the highest position



3 Unhook the harness straps from the yoke.



4 Pull the harness straps through the shell and cover to the front of the child seat.



5 Remove the screw to unlock the head restraint adjuster. Raise the head restraint to the highest position.

* Store the screw in a safe place.

6 Unhook the elastic bands, then remove the cover from the head restraint.

* Be careful not to damage the energy-absorbing foam.



7 Pull the elastic from the cup holders on the bottom of the seat.

8 Pull the fabric from the cup holder housing.

9 Unfasten the clips behind the armrests. (Seat shown laying on back.)





Cover Removal *continued*



- 10** Pull the cover from the lower belt guides.



- 11** Pull the harness buckle retainer away from the child seat to loosen.



- 12** Turn the retainer of the harness buckle so that the short side will pass through the slot in the child seat shell.



- 13** Pull the harness straps, buckle tongues, HUGS™ chest pads, and chest clip through the slots in the cover.



- 14** Pull the lower part of the cover from the bottom of the child seat shell.



- 15** Route the cover around the head restraint and remove the entire cover from the child seat shell.

Replacing the Cover



1 Move the head restraint to the highest position.

* Remove the screw to unlock the head restraint adjuster. Store the screw in a safe place.



2 Fit the cover around the head restraint.

* Be careful not to damage the energy-absorbing foam.




3 Fit the bottom of the cover over the lower part of the child seat shell.



4 Pull the harness straps through the appropriate holes in the cover.



5 Fit the elastic around the cup holders on the bottom of the child seat shell.

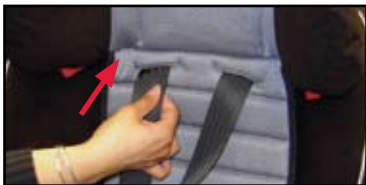

6 Move the head restraint to the lowest position. Ensure that harness slots in cover, head restraint and harness adjuster are aligned and route the harness straps through the harness slots and harness adjuster.



7 Route the harness straps behind the belt shield and re-attach to the harness yoke.

* Ensure the harness straps are not twisted.



8 Push the retainer through the slots in the child seat shell and cover to the bottom of the child seat.



9 Buckle the harness.

* Ensure the harness straps are not twisted and that the buckle faces out.



10 Replace the head restraint cover and re-attach the elastic loops to hold the cover in place.



11 Replace screw in head restraint to lock the head restraint adjuster.



12 Re-attach the clips behind the arm rests.



- 13** *Push the fabric into the groove around the cup holder housing.*



- 14** *Push the fabric under the lower belt guides.*

- 15** *Re-attach the elastic to hold the cover in place.*



Cleaning the Cover

- HAND WASH the cover using cold water and mild soap.
- LINE DRY to prevent the cover from shrinking.
- **DO NOT:**
 - * Bleach
 - * Machine wash
 - * Machine dry



Cleaning the Harness

- SPONGE CLEAN the harness using warm water and mild soap.
- TOWEL DRY
- **DO NOT:**
 - * Disassemble the harness
 - * Bleach
 - * Machine wash
 - * Machine dry

Cleaning the Shell

- SPONGE CLEAN the shell using warm water and mild soap.
- TOWEL DRY
- **DO NOT** use abrasive cleaners

Cleaning the Buckle

If your child eats and drinks while in the child seat, you may need to check the buckle periodically and wash out any accumulated debris or dried liquids.

Remove the Buckle



1 *Locate the metal buckle strap retainer on the bottom of the child seat.*



2 *Pull the retainer away from the child seat to loosen.*



3 Turn the retainer so that the short side will pass through the slot in the child seat shell.

4 Pull the retainer through the slots in the child seat shell and cover to the top of the child seat.

- THOROUGHLY RINSE the buckle using warm water.
- TEST THE BUCKLE by fastening and unfastening until a positive click is heard after inserting each buckle tongue. If clicks are not heard, repeat the cleaning procedure.
- TOWEL DRY
- **DO NOT:**
 - * Soak
 - * Lubricate
 - * Use solvents
 - * Use soap or household detergents



Re-thread the Buckle

1 Select the slot closest to, but not under the child.



2 Turn and push the buckle retainer so that the short side will pass through the slot in the cover and child seat shell.

3 Pull through the slots in the cover and shell to the bottom of the child seat.

4 Pull the buckle away from the child seat until tight.

- * Verify that the buckle retainer lies flat against the child seat shell.


NOTE: Ensure that the buckle strap is not twisted and that the button faces out.





Energy-Absorbing Tether

IMPORTANT: *The energy-absorbing tether has been designed to help indicate when the child seat has been in a moderate or severe crash and replacement of child seat is necessary.*

Figure 1 shows the tether when the child seat is acceptable for continued use (provided the child seat has not been involved in a crash). The colored stitching will be intact and the webbing will be held under a tether label.

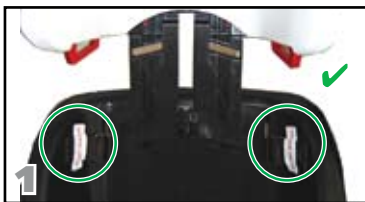

Figures 2 and 3 show examples of when the child seat is unacceptable for continued use. If the tether label is torn, or if one or both of the loops have pulled through the back side of the shell and/or any of the colored stitching has ripped, the child seat is no longer acceptable for use.

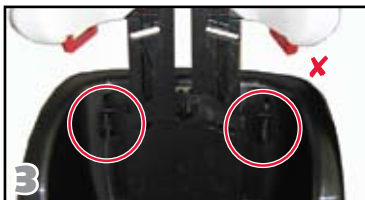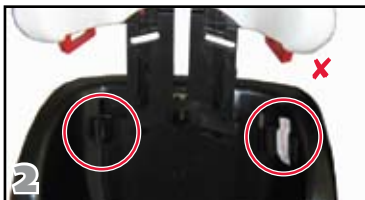

IMPORTANT: Discontinue use of child seat if it has been involved in a moderate or severe crash regardless of whether the loops have pulled through the back side of the shell and the colored stitching has been ripped.



Problem: The harness is hard to adjust.

Possible Solution: Check that the head restraint adjust and harness adjust are properly aligned. Do not use the head restraint adjuster when the harness is attached.

Possible Solution: The yoke may be caught on a strap or other component of the child seat. Remove the obstruction and try adjusting the harness again.

Problem: The buckle will not fasten with a click after each tongue is inserted

Possible solution: There may be debris in the buckle mechanism. Clean the buckle as shown on page 50 and 51 and try fastening the buckle again.

Problem: The cup holder will not go back into the stowed position.

Possible solution: The base of the cup holder is not unlocked. Push it up to unlock the cup holder and try stowing the cupholder.

If you have misplaced your head restraint lock-out screw, you can purchase a replacement #8 x 1/2" sheetmetal screw at any hardware store.

Please contact Consumer Services at 1.888.427.4829 if you have an issue not listed here.



This child seat was manufactured by Britax Child Safety, Inc. Britax® warrants this product to the original retail purchaser as follows:

LIMITED ONE-YEAR WARRANTY

This product is warranted against defective materials or workmanship for one year from the date of original purchase. Proof of purchase is required. Your exclusive remedy for this warranty is that Britax will, at its option, provide repair or replacement components for this product or refund the original purchase price of the product. Britax reserves the right to discontinue or change fabrics, parts, models or products, or to make substitutions. To make a claim under this warranty, you must contact Britax Consumer Services at 1-888-427-4829 or write to us using the address on the back cover of this booklet.

PLEASE COMPLETE AND MAIL THE OWNER REGISTRATION CARD WITHIN (30) DAYS OF PURCHASE

You may also register online at www.BritaxUSA.com/registration.

WARRANTY LIMITATIONS

This warranty does not include damages which arise from negligence, misuse or use not in accordance with the product instruction.

The use of non-Britax Child Safety, Inc. covers, inserts, toys, accessories, or tightening devices is not approved by Britax. Their use could cause this child seat to fail Federal Safety Standards or not perform as intended in a crash. Their use automatically voids the Britax warranty.

LIMITATION OF DAMAGES

The warranty and remedies as set forth above are exclusive and in lieu of all others, oral or written, express or implied. In no event will Britax, or the retailer selling this product, be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

LIMITATIONS OF WARRANTIES AND OTHER WARRANTY TERMS AND STATE LAWS

Any implied warranties, including implied warranties of merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither Britax, nor the retailer selling this product, authorizes any person to create for it any other warranty, obligation, or liability in connection with this product.





IMPORTANT!

☒ **DOUBLE CHECK EVERY TIME YOU USE THIS CAR SEAT.**


Double Check Car Seat-to-Vehicle Installation:

- ☒ Check that the LATCH or vehicle seat belt connections to the vehicle are tight and secure.
- ☒ Verify the car seat cannot be moved front-to-back or side-to-side more than one inch at the belt path.

Double Check Child-to-Car Seat Installation:

- ☒ Tug on the buckle to ensure a proper connection.
- ☒ Confirm that the harness straps are snug and over both shoulders and hips. You should not be able to pinch excess harness strap webbing at the child's shoulder.
- ☒ Make sure the chest clip is properly fastened and positioned in the middle of the child's chest at armpit level.

MADE IN



U. S. A.
WITH GLOBAL COMPONENTS

Britax Child Safety, Inc.
13501 South Ridge Drive
Charlotte, NC 28273
USA

A Britax Childcare Group Limited
company

Tel 1.888.427.4829

www.BritaxUSA.com